

Two For One Twister For Embroidery Thread

Salient Features:

- For all kind of S & Z Twist.
- Machine Construction Offers Long Lasting Maintenance Free Performance.
- Operating Panel with Motor Protecting devices & smooth Start.
- Rational deign of the Gearbox **permits** ideal take-up. The driving parts are automatically lubricated by the oil pump for optimum performance.
- Low Power Consumption
- Yarn Sensors avoids single ply with the help of Cutter.






MAHASHIV
TEXTILE ENGINEERING PVT. LTD.





Technical Specification : Two for One Twister (Embroidery Thread)

Machine Type	Double Sides Double Layer
Spindle RPM	4000-12000
Spindle Drive System	Tangential Belt
Twist Range	150-1200
Machine Width	800mm
Machine Height	2000mm
Start Mode	Slow Start Star-Delta

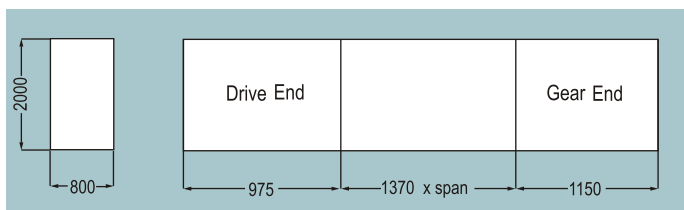
Primary Stage

Model No.	EM1-90	EM2-90	EM3-110		
No. Of Spindles	208/224/240				
Spindle Gauge in mm.	160				
Pot Dia in mm.	70				
Denier Range	50-150				
Installed Power in H.P.	5 HP				
Supply Package in mm			Take-up Package in mm		
EM1-90	EM2-90	EM3-110	EM1-90	EM2-90	EM3-110
					
					

Secondary Stage

Model No.	EM1-90	EM-90	EM3-110		
No. Of Spindles	156/168/180	130/140/150			
Spindle Gauge in mm.	215	260			
Pot Dia in mm.	90		110		
Denier Range	50-300				
Installed Power in H.P.	7.5 HP				
Supply Package in mm			Take-up Package in mm		
EM1-90	EM2-90	EM3-110	EM1-90	EM2-90	EM3-110
					
					
					

Machine dimension



MAHASHIV
TEXTILE ENGINEERING PVT. LTD.

